


STRAUB-OPEN-FLEX-FIRE-FENCE 3

ø 219.1 - 406.4 mm

Components / Materials	W1	W2	W4	W5
Casing				S32101
Bolts				AISI 316 L
Bars				AISI 316 L or similar
Strip insert (option)				HDPE

Sealing sleeve	Temp.: -20°C up to +100°C
EPDM	Medium: all qualities of water, waste water, air, solids and chemical products
Sealing sleeve	Temp.: -20°C up to +80°C
NBR	Medium: water, gas, oil, fuel and other hydrocarbons

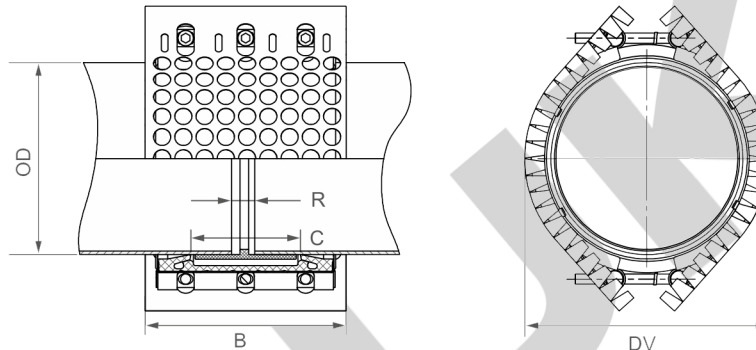

OD [mm]	Clamping range [mm]	PN [bar]	B [mm]	C [mm]	DV [mm]	Torque rate [Nm]	R without strip insert [mm]	R with strip insert [mm]
219.1	216 - 222	5 ¹¹	235	127	285	60	40	15
250.0	247 - 253	5 ¹¹	235	127	316	60	40	15
267.0	264 - 270	5 ¹¹	235	127	333	60	40	15
273.0	270 - 276	6	235	127	339	60	40	15
304.0	301 - 307	5	235	127	370	60	40	15
323.9	321 - 327	5	235	127	393	60	40	15
406.4	403 - 409	5	235	127	475	60	40	15