


STRAUB-OPEN-FLEX-FIRE-FENCE 4

ø 323.9 - 508.0 mm

Components / Materials	W1	W2	W4	W5
Casing				S32101
Bolts				AISI 316 L
Bars				AISI 316 L or similar
Strip insert (option)				HDPE
Sealing sleeve EPDM	Temp.: -20°C up to +100°C	Medium: all qualities of water, waste water, air, solids and chemical products		
Sealing sleeve NBR	Temp.: -20°C up to +80°C	Medium: water, gas, oil, fuel and other hydrocarbons		

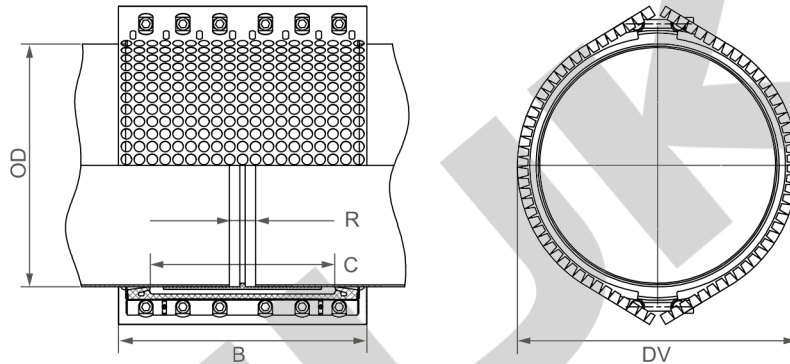

OD [mm]	Clamping range [mm]	PN [bar]	B [mm]	C [mm]	DV [mm]	Torque rate [Nm]	R without strip insert [mm]	R with strip insert [mm]
323.9	320 - 327	6	472	350	399	40	20	200
355.6	352 - 359	6	472	350	431	40	20	200
406.4	403 - 409	6	472	350	481	40	20	200
457.2	454 - 460	6	472	350	532	40	20	200
508.0	505 - 512	6	472	350	583	40	20	200
558.8	555 - 562	6 ¹²	472	350	634	40	20	200
609.6	606 - 613	6 ¹²	472	350	685	40	20	200
655.0	652 - 658	6 ¹²	472	350	730	40	20	200
711.2	707 - 715	6 ¹²	472	350	786	40	20	200
762.0	758 - 766	6 ¹²	472	350	837	40	20	200
812.8	809 - 817	6 ¹²	472	350	888	50	20	200